



Technical Specifications

VERSION 2022.01



Abask 4

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH2-55 x 40	TLN2-55 x 40	550 x 428 mm	4	40 Watts
TLH2-55 x 48	TLN2-55 x 48	550 x 508 mm	4	40 Watts
TLH2-55 x 60	TLN2-55 x 60	550 x 628 mm	4	45 Watts
TLH2-55 x 75	TLN2-55 x 75	550 x 778 mm	4	50 Watts
TLH2-55 x 90	TLN2-55 x 90	550 x 928 mm	4	65 Watts

NOTES

- This is a 240VAC product - Earth connection is ESSENTIAL
- Safe to be installed in Zone 1 (wet areas)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less \$50)
- Plug-In version available (Plus \$50)

STANDARD FINISHES

Mirror Polished
Stainless Steel

RRP

Brushed
Stainless Steel

+20% (Stocked)

Matt Black
Painted

+40% (Stocked)

Gunmetal
PVD

+50% (Stocked)

Brushed Gold
PVD

+60% (Stocked)

SPECIFICATIONS

Voltage
240 Volts

Material
Stainless Steel 304

Finish
Mirror Polished

Ingress Protection
IPX5 (Suitable for wet areas)

Standards
AS/NZ 60335.2.43

Electrical Connection
Concealed Wiring std - any leg

Heating Method
Dry Internal Heating Element

Options
Non Heated, Plug-In

MADE IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



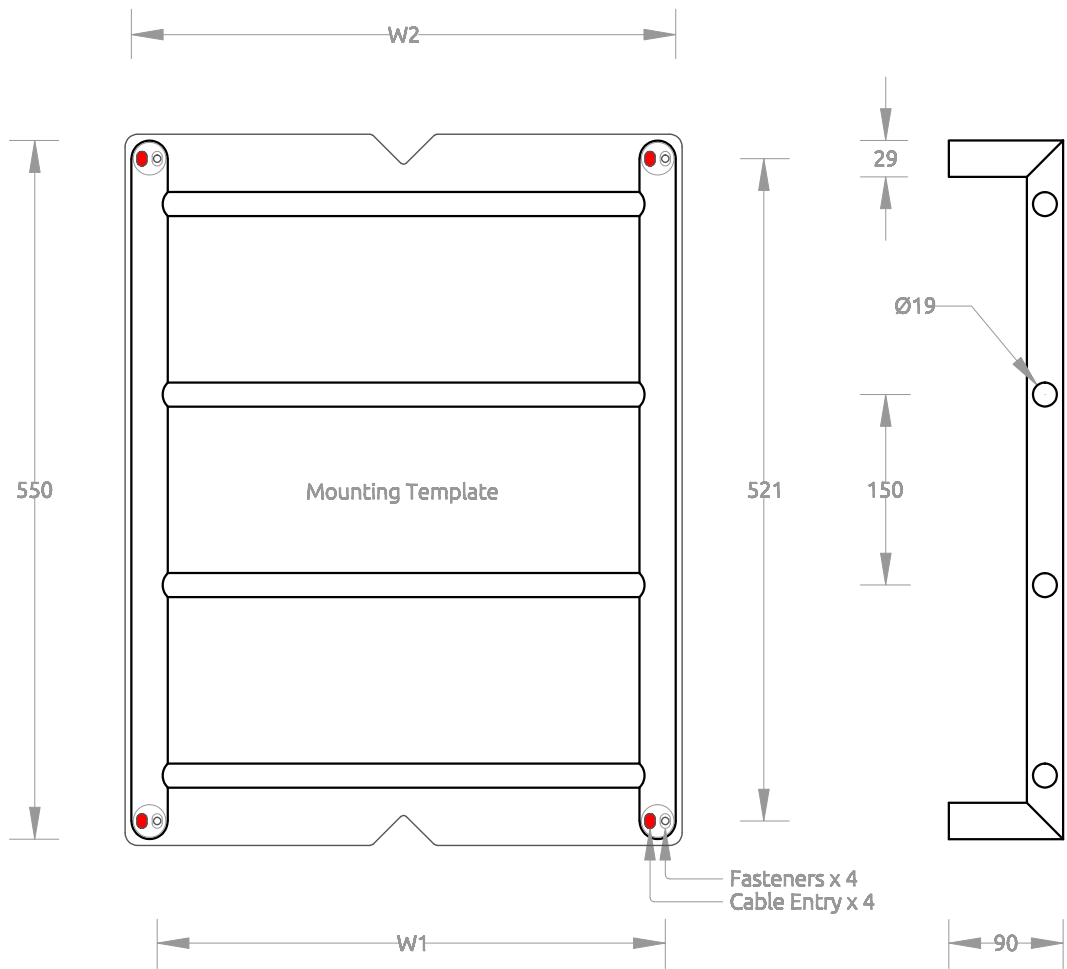

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH2-55x40	TLN2-55x40	400mm	428mm
TLH2-55x48	TLN2-55x48	480mm	508mm
TLH2-55x60	TLN2-55x60	600mm	628mm
TLH2-55x75	TLN2-55x75	750mm	778mm
TLH2-55x90	TLN2-55x90	900mm	928mm