



**A94.65**  
SWIRLFLUSH TOILET SUITE  
4 STAR 4.5/3Lpm WELS RATING

Toilet to be installed by a licenced plumber in accordance with AS/NZS 3500.1 and AS/NZS 3500.2  
IMPORTANT - ensure backflow prevention conforms with the requirements set out in AS/NZS 3500.1

COMES WITH:  
STANDARD SOFT-CLOSE SEAT




**A94.65.99**  
SLIM SOFT-CLOSE SEAT




FLUSHING CONNECTION (OPTIONAL)





S-TRAP















PVC PIPE  
(SUPPLIED BY OTHERS)



T-SHAPE VARIO BEND  
(SOLD SEPARATELY)

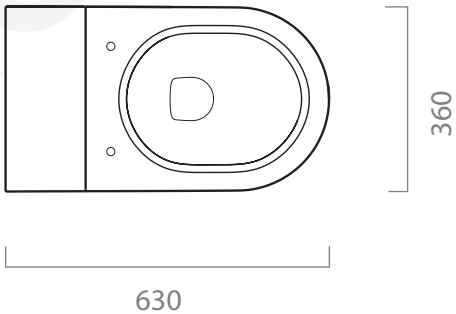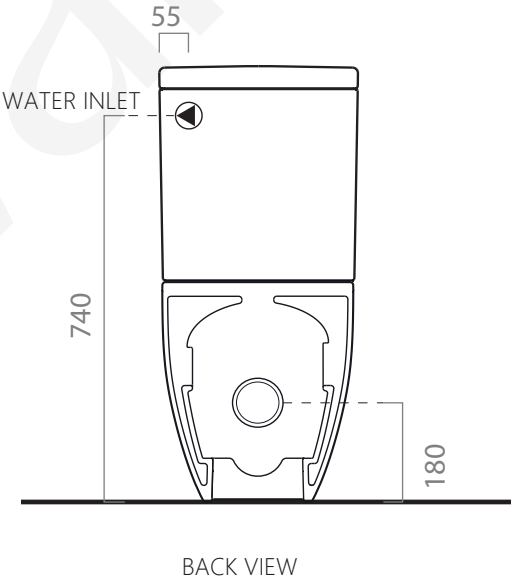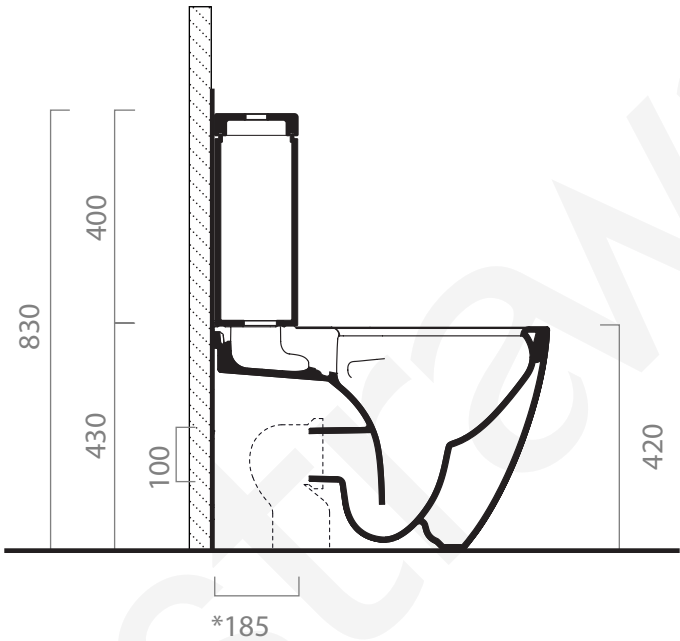

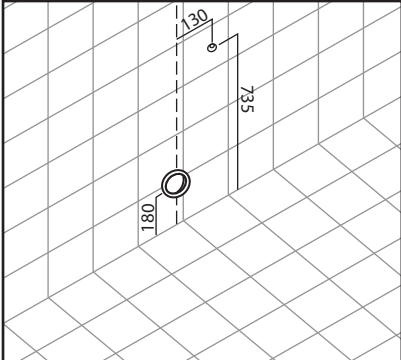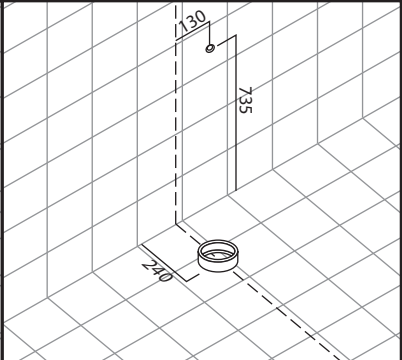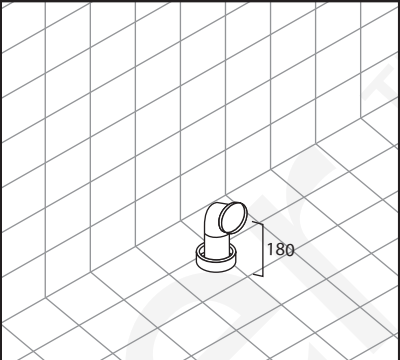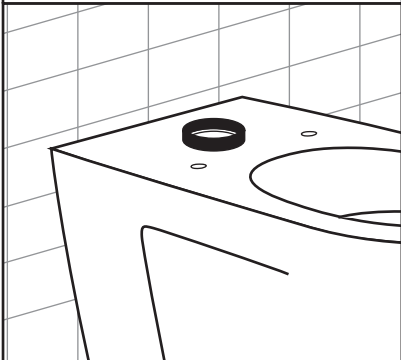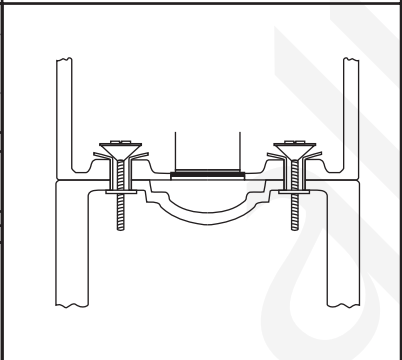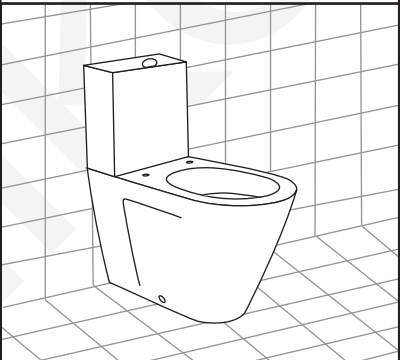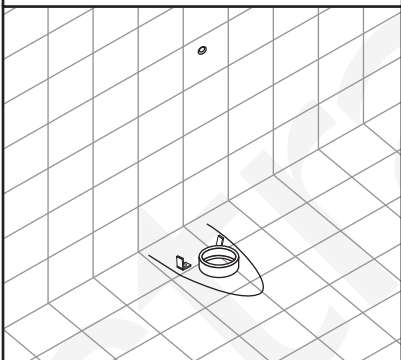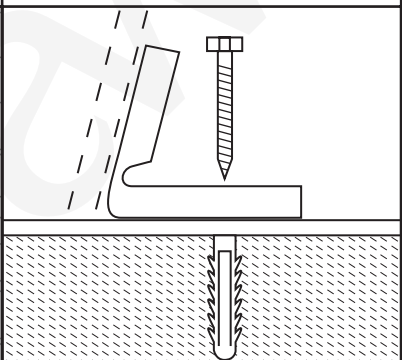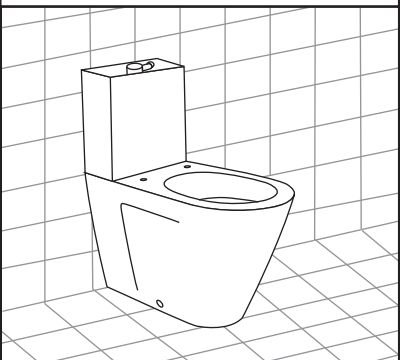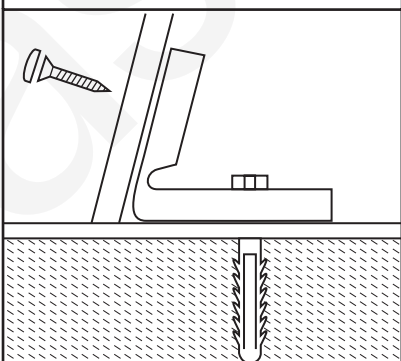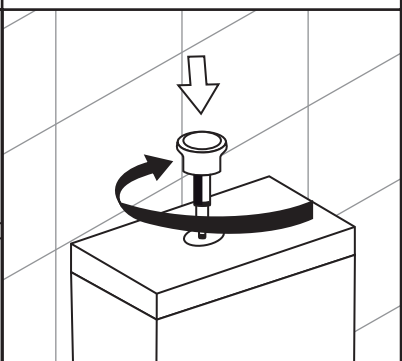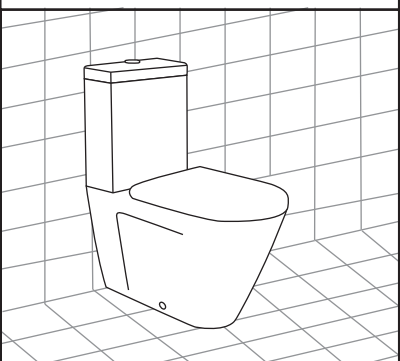A94.65  
SWIRLFLUSH TOILET SUITE  
4 STAR 4.5/3Lpm WELS RATING

		
Outlet to wall / place the pipes	Outlet to floor / place the pipes	Fasten the pipen elbow
		
Place the black rubber seal	Fix the cistern on the WC	Put the WC temporarily in place
		
Mark the position of fixing and the base of WC	Install the fixing on floor	Place the WC and connect the inlet valve
		
Fix the WC on the floor. Do not use cement	Screw in the flush bottom	Install the seat cover