



Technical Specifications

VERSION 2022.01



Abask 6

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH2-85 x 40	TLN2-85 x 40	850 x 428 mm	6	52 Watts
TLH2-85 x 48 (*LV)	TLN2-85 x 48	850 x 508 mm	6	58 Watts
TLH2-85 x 60 (*LV)	TLN2-85 x 60	850 x 628 mm	6	66 Watts
TLH2-85 x 75 (*LV)	TLN2-85 x 75	850 x 778 mm	6	72 Watts
TLH2-85 x 90	TLN2-85 x 90	850 x 928 mm	6	93 Watts




NOTES


- This is a 240VAC product - Earth connection is ESSENTIAL
- Safe to be installed in Zone 1 (wet areas)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less \$50)
- Plug-In version available (Plus \$50)
- *LV - Low Voltage version - Includes Transformer (+\$135)

STANDARD FINISHES

Mirror Polished Stainless Steel RRP	Brushed Stainless Steel +20% (Stocked)	Matt Black Painted +40% (Stocked)	Gunmetal PVD +50% (Stocked)	Brushed Gold PVD +60% (Stocked)
--	---	--	--	--

SPECIFICATIONS

Voltage 240 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA 
Material Stainless Steel 304	Electrical Connection Concealed Wiring std - any leg	HEATING TIME 30 MINUTES 
Finish Mirror Polished	Heating Method Dry Internal Heating Element	WARRANTY 10 YEAR 
Ingress Protection IPX5 (Suitable for wet areas)	Options Non Heated, Plug-In, Low Voltage	

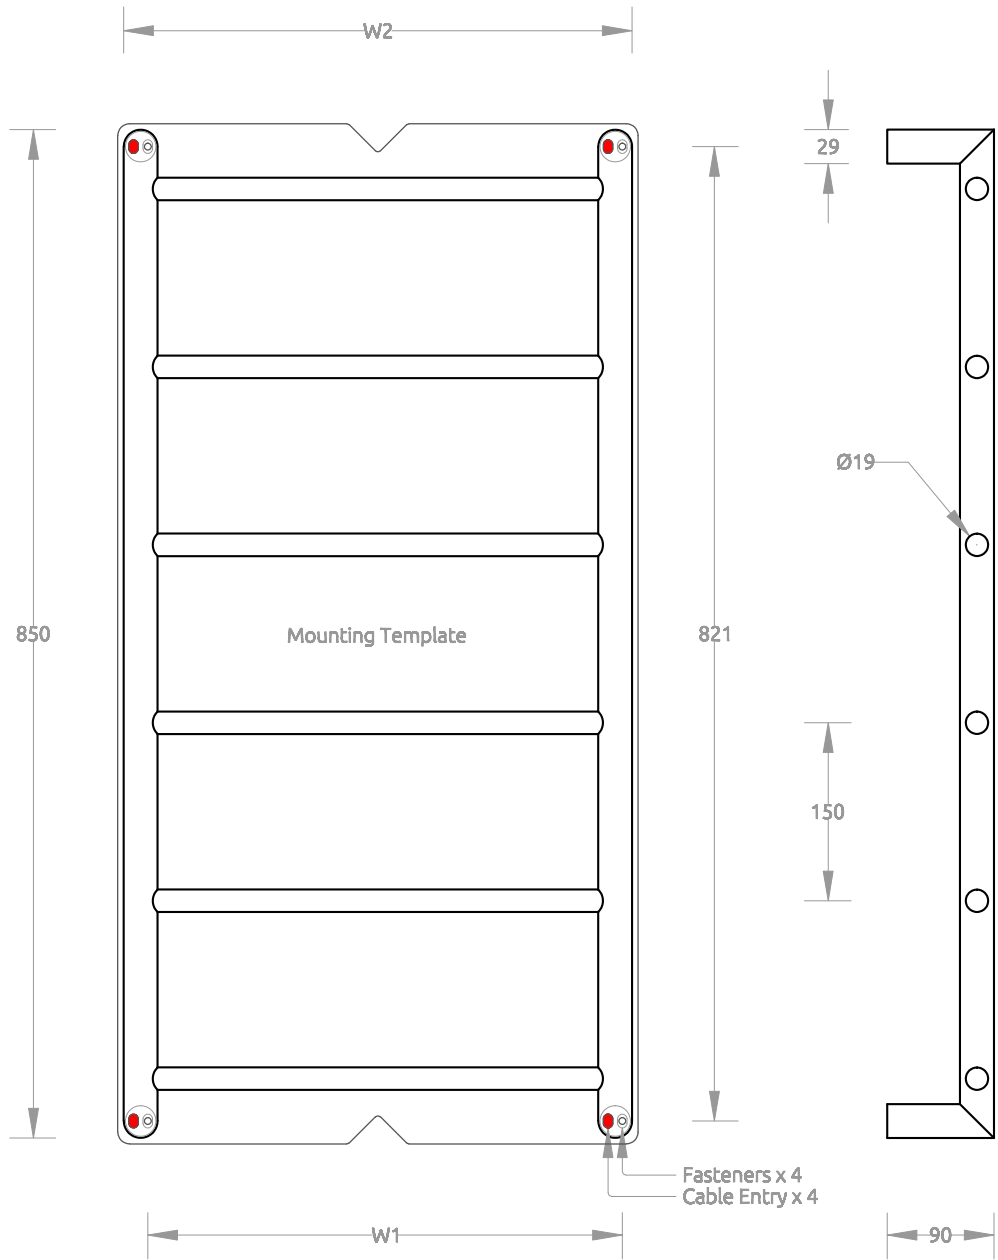

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH2-85x40	TLN2-85x40	400mm	428mm
TLH2-85x48 (*LV)	TLN2-85x48	480mm	508mm
TLH2-85x60 (*LV)	TLN2-85x60	600mm	628mm
TLH2-85x75 (*LV)	TLN2-85x75	750mm	778mm
TLH2-85x90	TLN2-85x90	900mm	928mm