

# Caroma®


## Leda

Vitreous China Wall Faced Back Inlet  
Box Rim Pan

CI/SfB	(74.1)	g3
Date		
June 2015		

Supersedes all previous issues


# 4.07.1






A premium designed wall faced back inlet pan with partial box rim delivering a 4.5/3 litre dual flush. The pan connection system includes the patented Caroma Uni-Orbital® connector that extends to any position in a 25mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 170mm with a recommended setout of 90mm. The combination of smooth sides and concealed plumbing fittings with the wall faced concept provides for optimum ease of cleaning and low cost maintenance enhanced by the rim design which maximises the washed area of the bowl.

- Pan:** Leda wall faced back inlet 4.5 litre full flush partial box rim pan.
- Traps:** Universal trap for S or P-trap installations.
- Inlet:** 50mm back inlet for concealed cistern and flushvalve installation.
- Cisterns and Flushvalves:** Caroma Concealed Cistern options available – **Invisi II Under Counter/Inwall/ Induct/Inceiling Cisterns, Slimline Induct Cistern, Schell WC Flushvalve Inwall/ Induct.** For installation options see chapter 6 CISTERNS of the Caroma Technical Manual for further details.
- Fixing:** The pan can be fixed to the floor by either bedding into mortar or using the D82 Concealed Fixing Bracket.
- Seats:** Seats with the Universal Blind Fixing Hinge are essential for installation with Leda pans. The **Pedigree II, Pedigree II Care** and **Pressalit** seats are recommended. See chapter 5.01 SEATS of the Caroma Technical Manual for further details.
- Colours:** White only.
- Installation:** The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.
- Dimensions:** All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

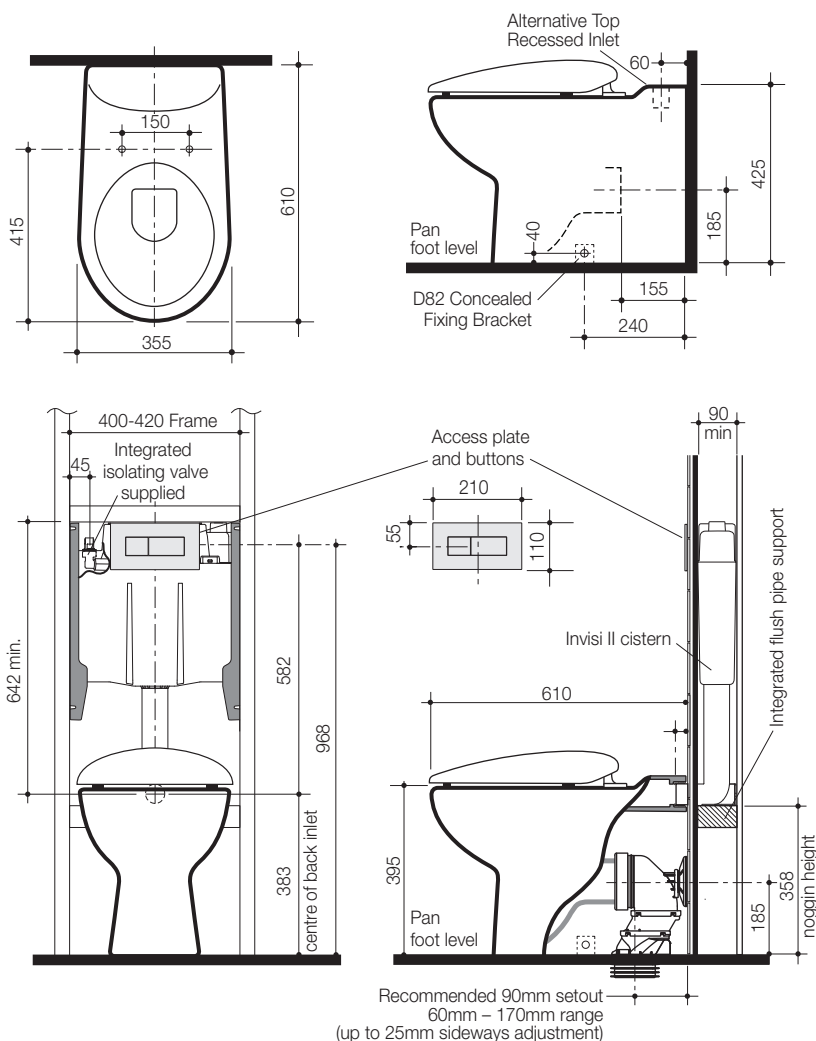

Leda Pan	Code No.
Standard Back Inlet 4.5/3 litre or Full Flush Use:	618410
<b>To achieve 4 star water efficiency rating, this pan should be matched with:</b>	
Invisi II 4 star 4.5/3 litre Cistern	237001

**D.82 Concealed Fixing Bracket**



**Note:** All height dimensions to underside of pan, make allowance for bedding.

**Bedding:** The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

**Bracket fixing:** The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.