

## DETAILED WRITTEN INSTALLATION INSTRUCTIONS

In surface requirements – 2 of 25.4mm holes at 150mm centres

1. Insert transparent washers through both tails.
2. Assemble sink set onto surface through holes; ensuring washers are sandwiched between sink set and the surface.
3. Insert fibre washers and nuts, ensuring washers are sandwiched between the nut and the surface underneath and the grub screw for the spout should be installed at the back.
4. Tighten both nuts.
5. Align spout onto breach.
6. Press fit spout onto breach until spout bottoms out with breach.
7. Screw in grub screw using provided 2mm Allen Key. The nylon on the swivel has a gap. This gap must be aligned with the grub screw when inserted.
8. Do up grub screw all the way until it stops, then relieve back slightly to allow spout to swivel. Still check if spout is already installed to the breach. Grub screw should not be visible from end users front view.

**IMPORTANT** Maximum hot water temperature 65°C and 500 kPa Maximum operating pressure at any outlet within a building (Ref AS/NZS 3500)

**WARRANTY** The Company accepts responsibility for any fault due to the Company's own workmanship or materials except for subjective variations or random unavoidable blemishes of a minor non-functional nature. This acceptance of responsibility is for 5 years from the date of installation, proof of which may be required.



CB IDEAL TAPWARE PTY LTD

1A DELORAINIE ROAD, EDWARDSTOWN S.A. 5039

PH: (08) 8276 6766 | sales@cbideal.com.au

ABN: 98 156 625035 | ACN: 156 625 035


# EXPOSED HOB SINK SET WITH SWIVEL OUTLET

## INSTALLATION INSTRUCTIONS





[www.cbideal.com.au](http://www.cbideal.com.au) | [sales@cbideal.com.au](mailto:sales@cbideal.com.au)

1

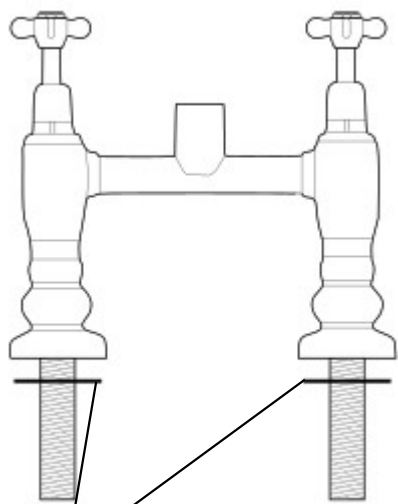


INSERT TRANSPARENT  
WASHERS

2

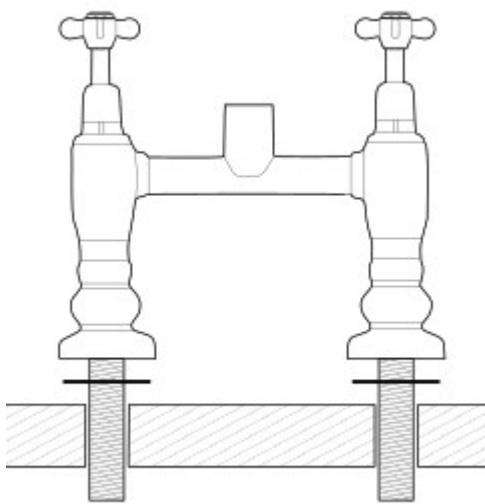


3

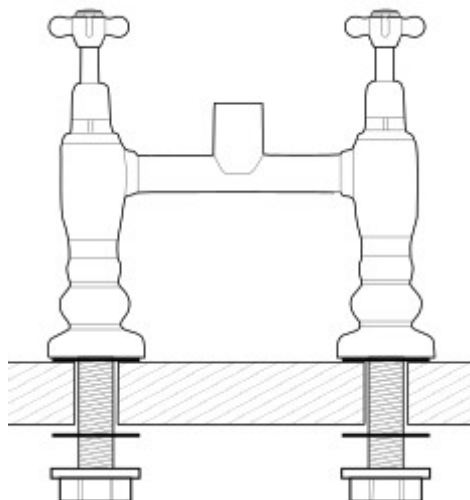


INSERT WASHERS & NUTS


4

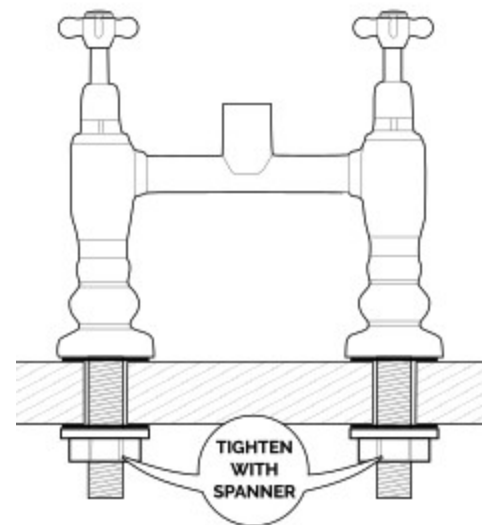


5

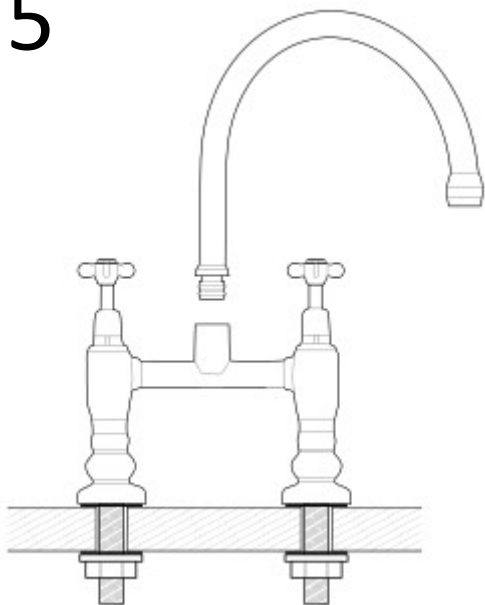

6

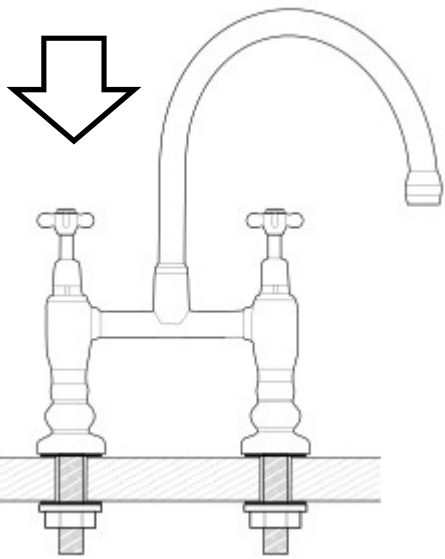

7

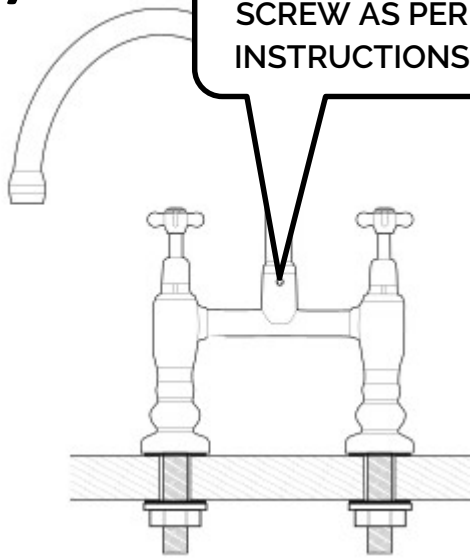

8

