


EN Instructions for use / Assembly instructions


DE Gebrauchsanleitung / Montageanleitung

2


2




**Focus M41
260 1jet**
31820XX3
31866XX9



**Focus M41
280 1jet**
31817XX3
31873XX9



MySport L 1jet
13862003



Ecos L 1jet
14816003



Safety Notes

- ⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.
- ⚠ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Hot water temperature:	max. 60 °C
Thermal disinfection:	70 °C / 4 min
The product is exclusively designed for drinking water!	

Symbol description



Do not use silicone containing acetic acid!



Adjustment (see page 7)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.



Dimensions (see page 9)



Flow diagram (see page 11)



Spare parts (see page 12)

- XX = Colors
- 00 = Chrome Plated
- 14 = Brushed Bronze
- 34 = Brushed Black Chrome
- 67 = Matt Black



Cleaning (see page 8)



Operation (see page 8)

Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.

Sicherheitshinweise

- ⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.
- ⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Heißwassertemperatur:	max. 60 °C
Thermische Desinfektion:	70 °C / 4 min
Das Produkt ist ausschließlich für Trinkwasser konzipiert!	

Symbolerklärung



Kein essigsäurehaltiges Silikon verwenden!



Justierung (siehe Seite 7)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.



Maße (siehe Seite 9)



Durchflussdiagramm (siehe Seite 11)



Serviceile (siehe Seite 12)

- XX = Farbcodierung
- 00 = Chrom
- 14 = Brushed Bronze
- 34 = Brushed Black Chrome
- 67 = Mattschwarz









Reinigung (siehe Seite 8)



Bedienung (siehe Seite 8)


Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.



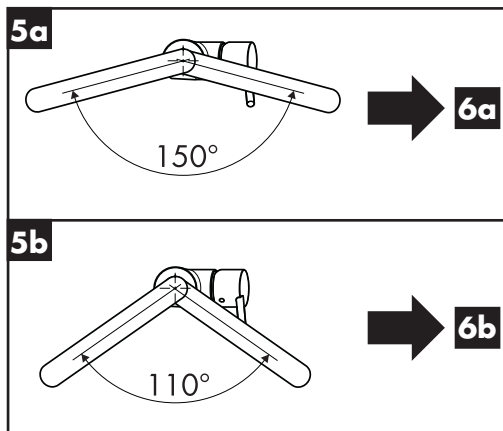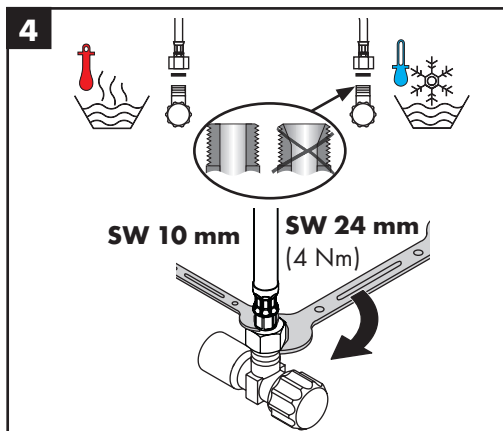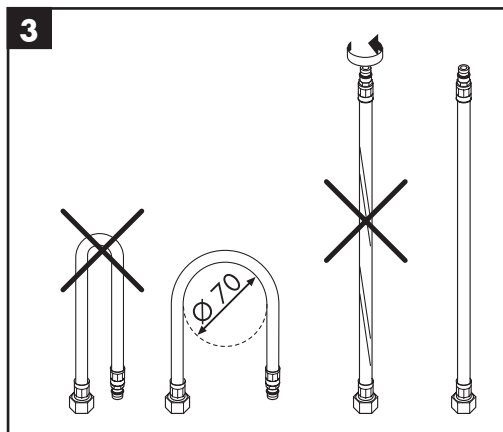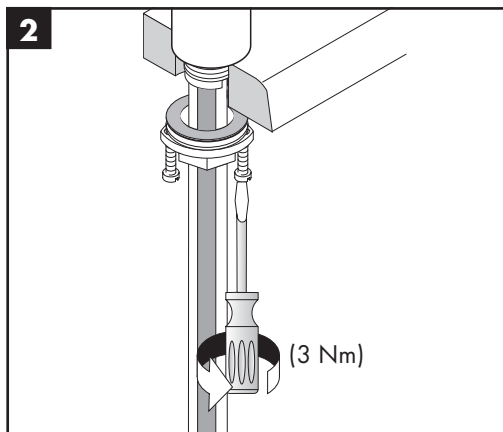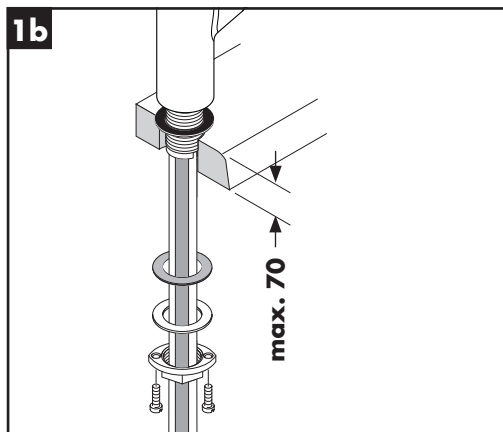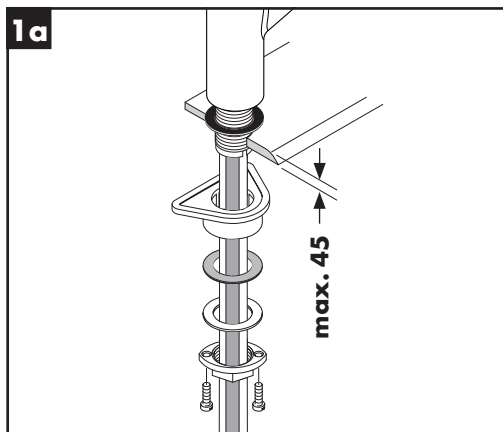







6a







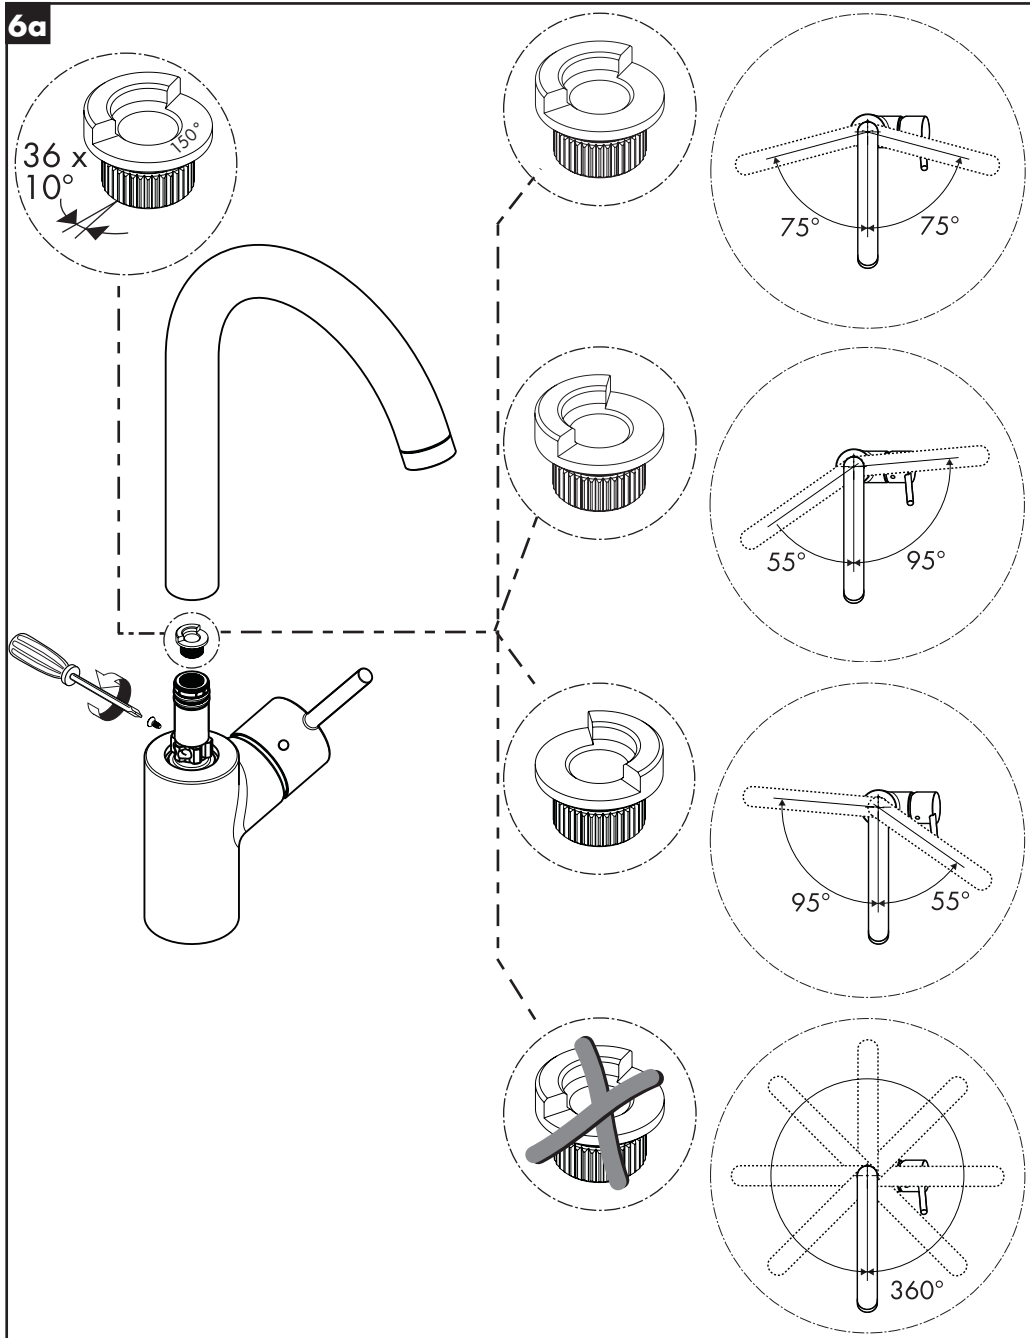




6b

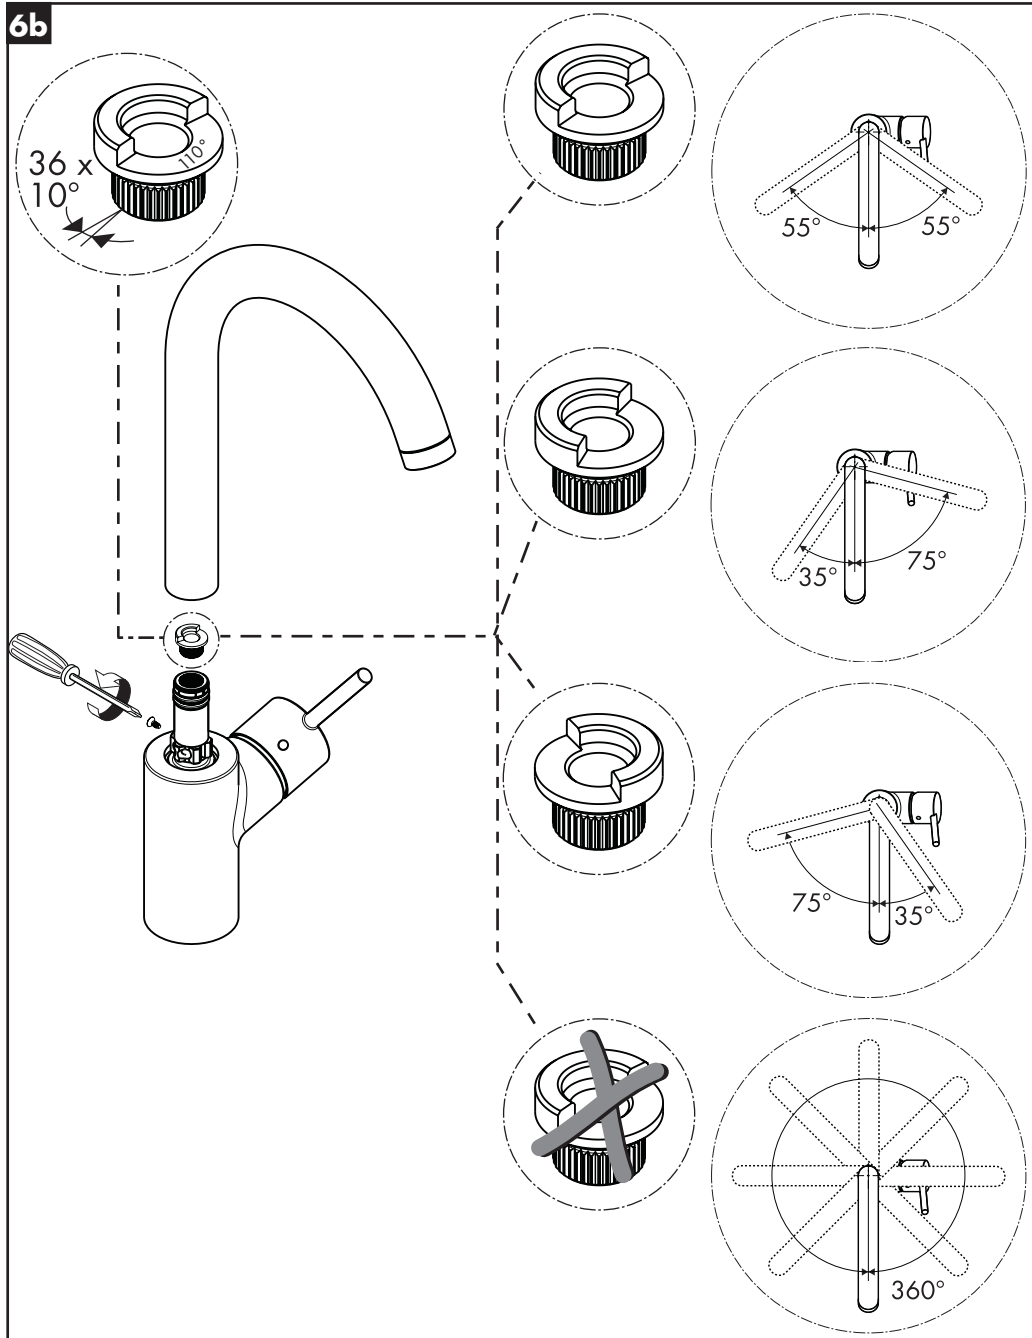


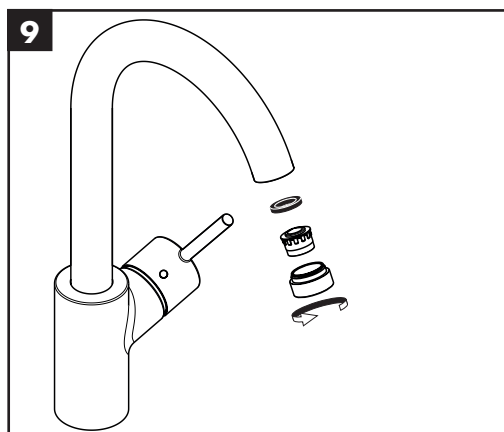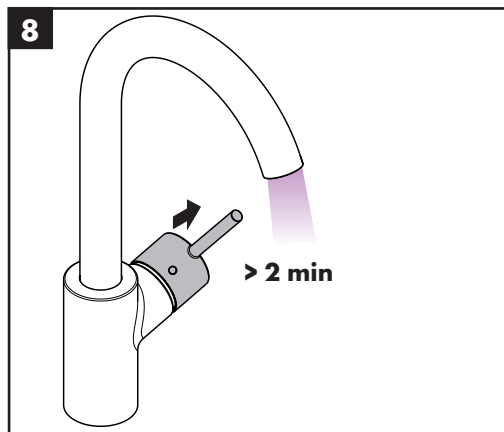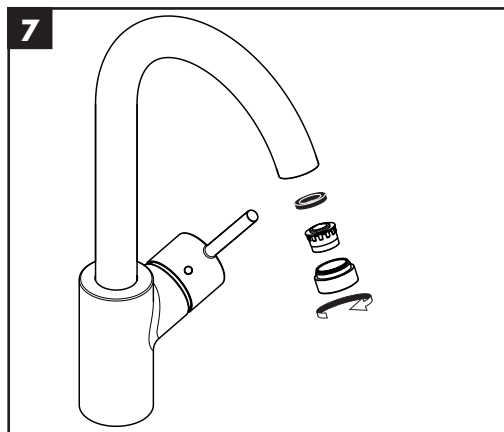

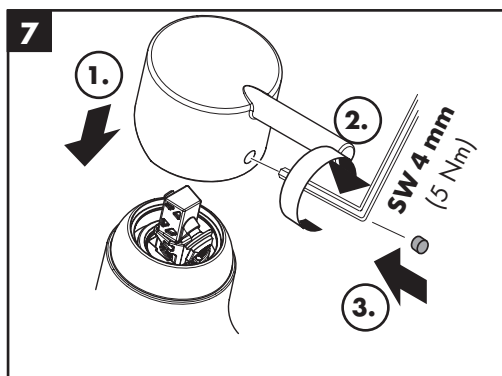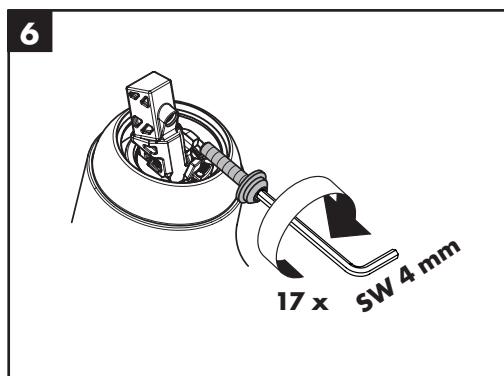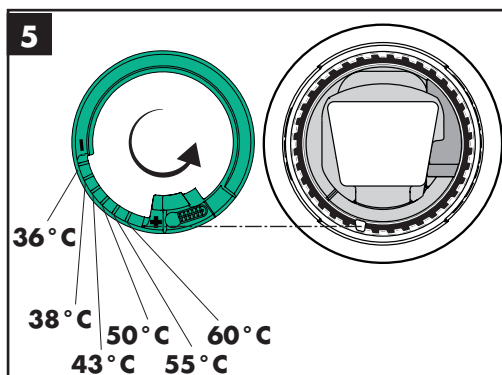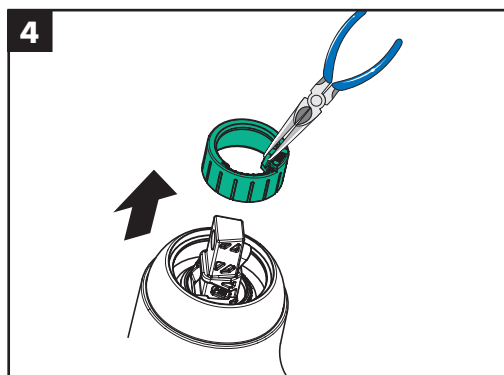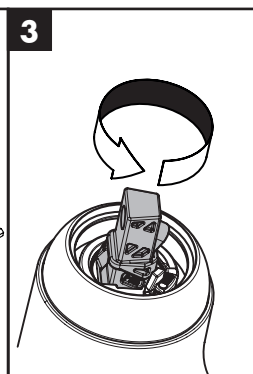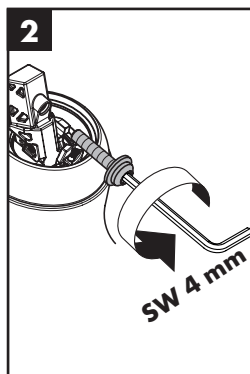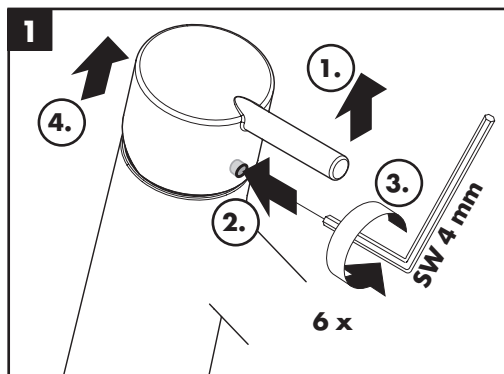



www.hansgrohe.com/cleaning-recommendation




EN Cleaning recommendation / Warranty / Contact


DE Reinigungsempfehlung / Garantie / Kontakt



MySport L 1jet 13862003

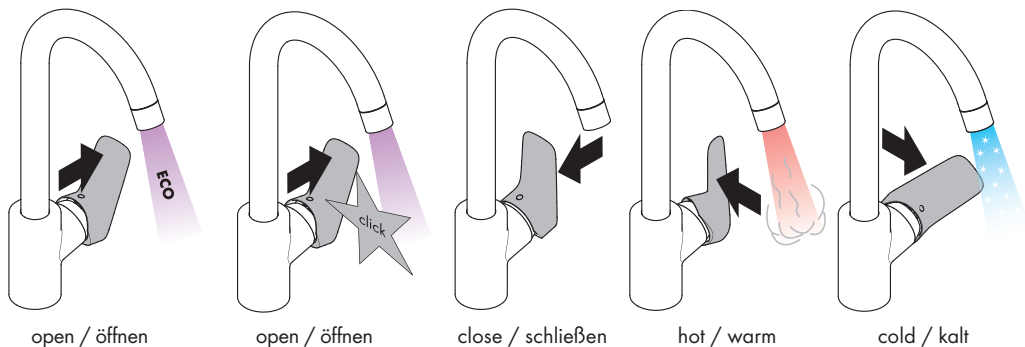



Focus M41 260 1jet 31866XX9 / Focus M41 260 1jet 31820XX3 /
Focus M41 280 1jet 31817XX3 / 31873XX9 / Ecos L 1jet 14816003

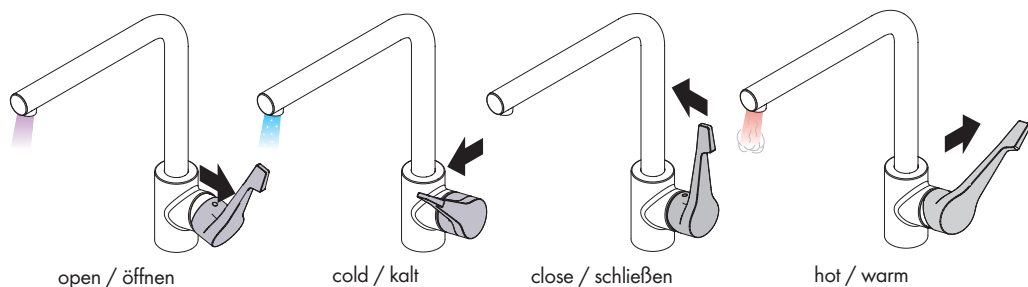





Focus M41 280 1jet

31817XX3 / 31873XX9

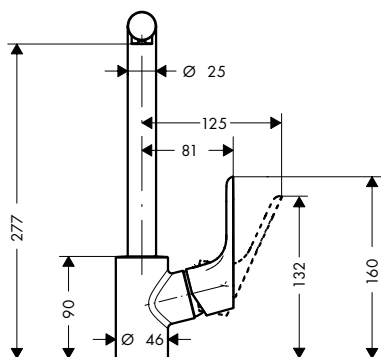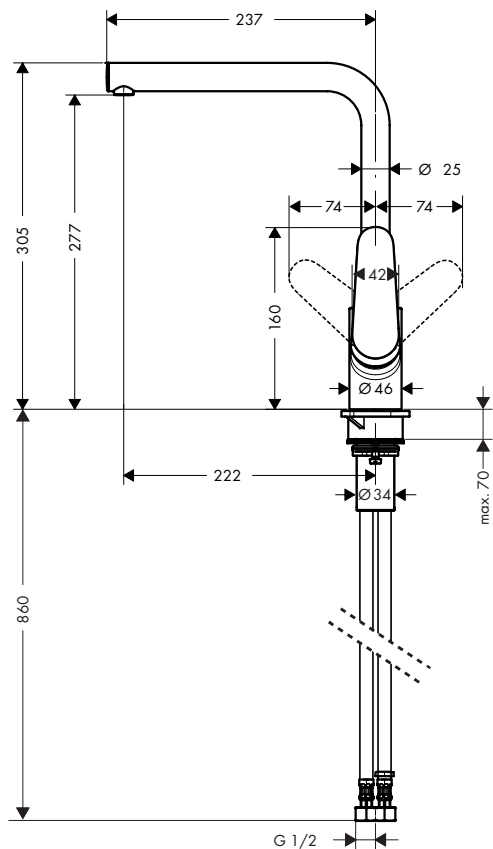

Focus M41 260 1jet



31820XX3 / 31866XX9

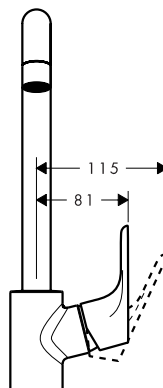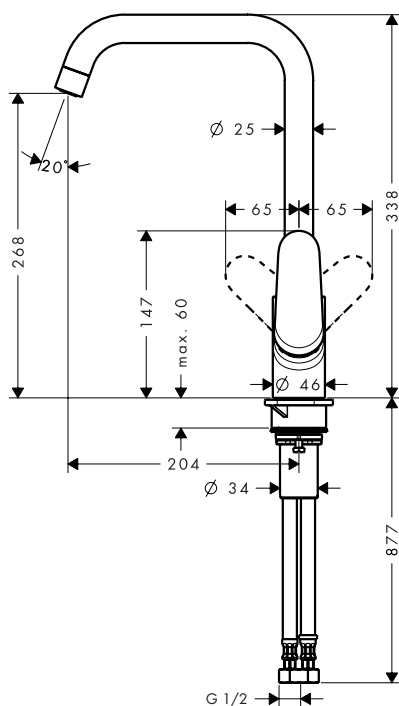





MySport L 1jet

13862003

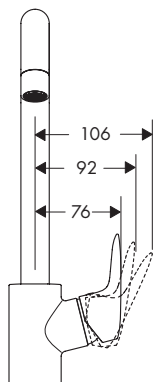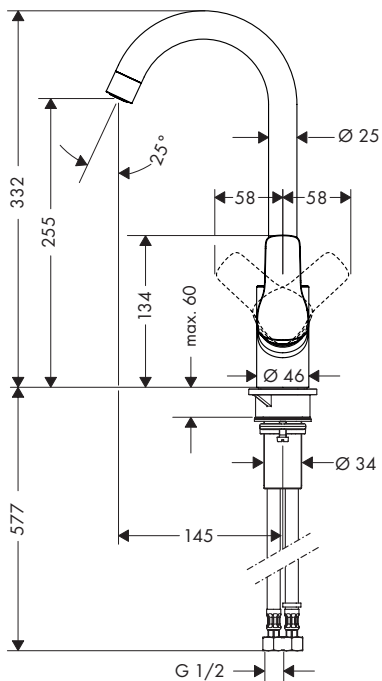


Ecos L 1jet

14816003

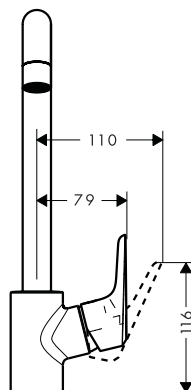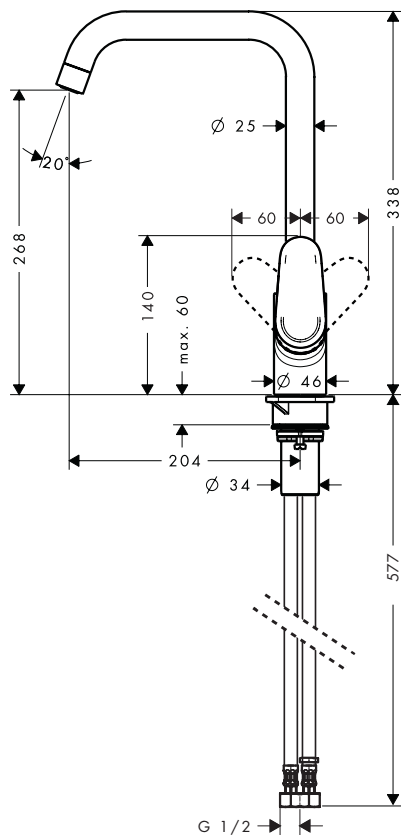





Focus M41 280 1jet 31873XX9

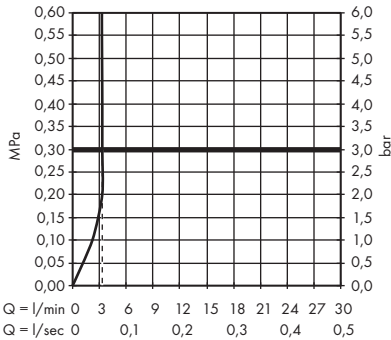


Focus M41 260 1jet 31866XX9

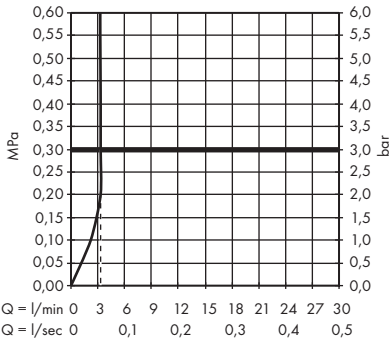

Focus M41 280 1jet 31817XX3
Focus M41 260 1jet 31820XX3
Ecos L 1jet 14816003

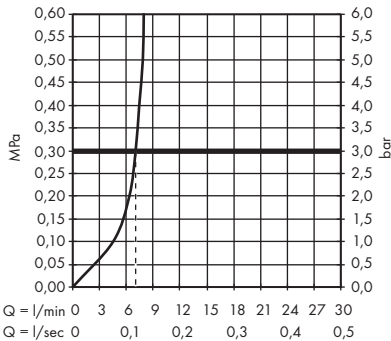


MySport L 1jet 13862003

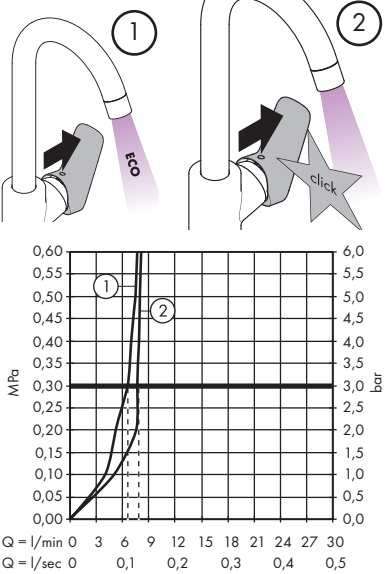




MySport L 1jet

13862003

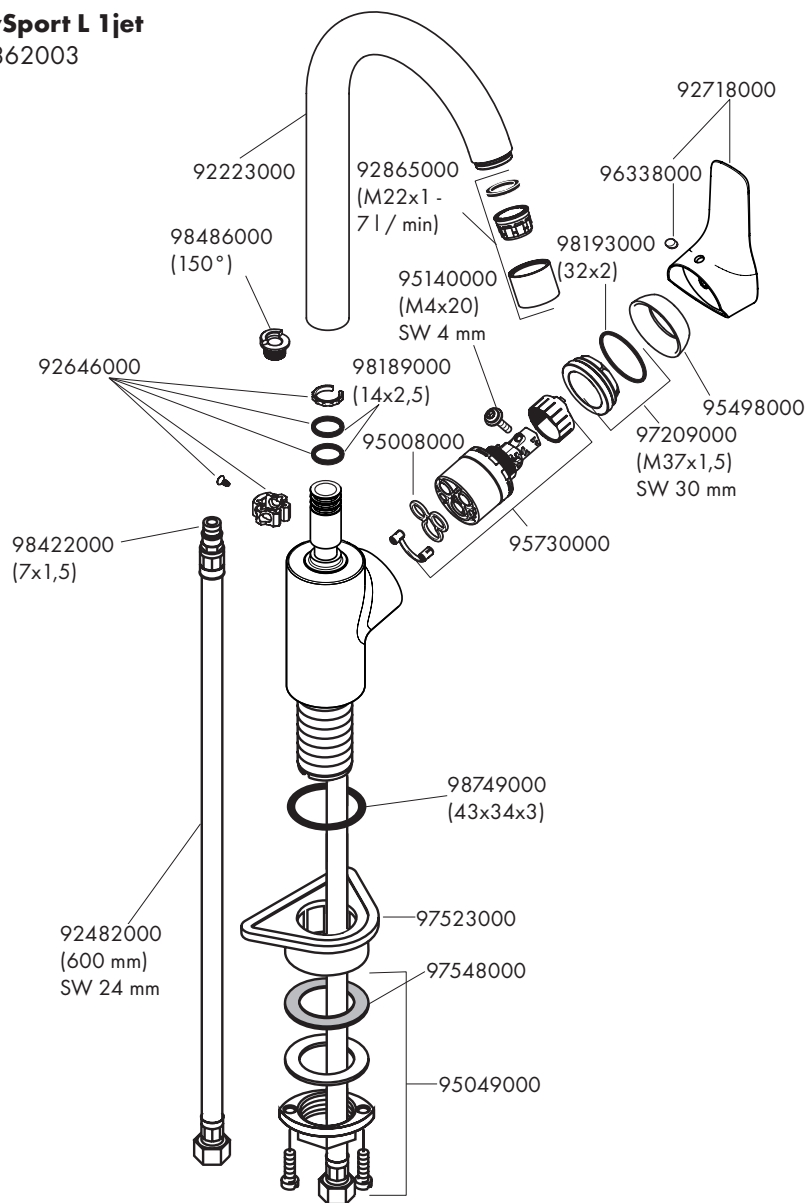


Ecos L 1jet 14816003

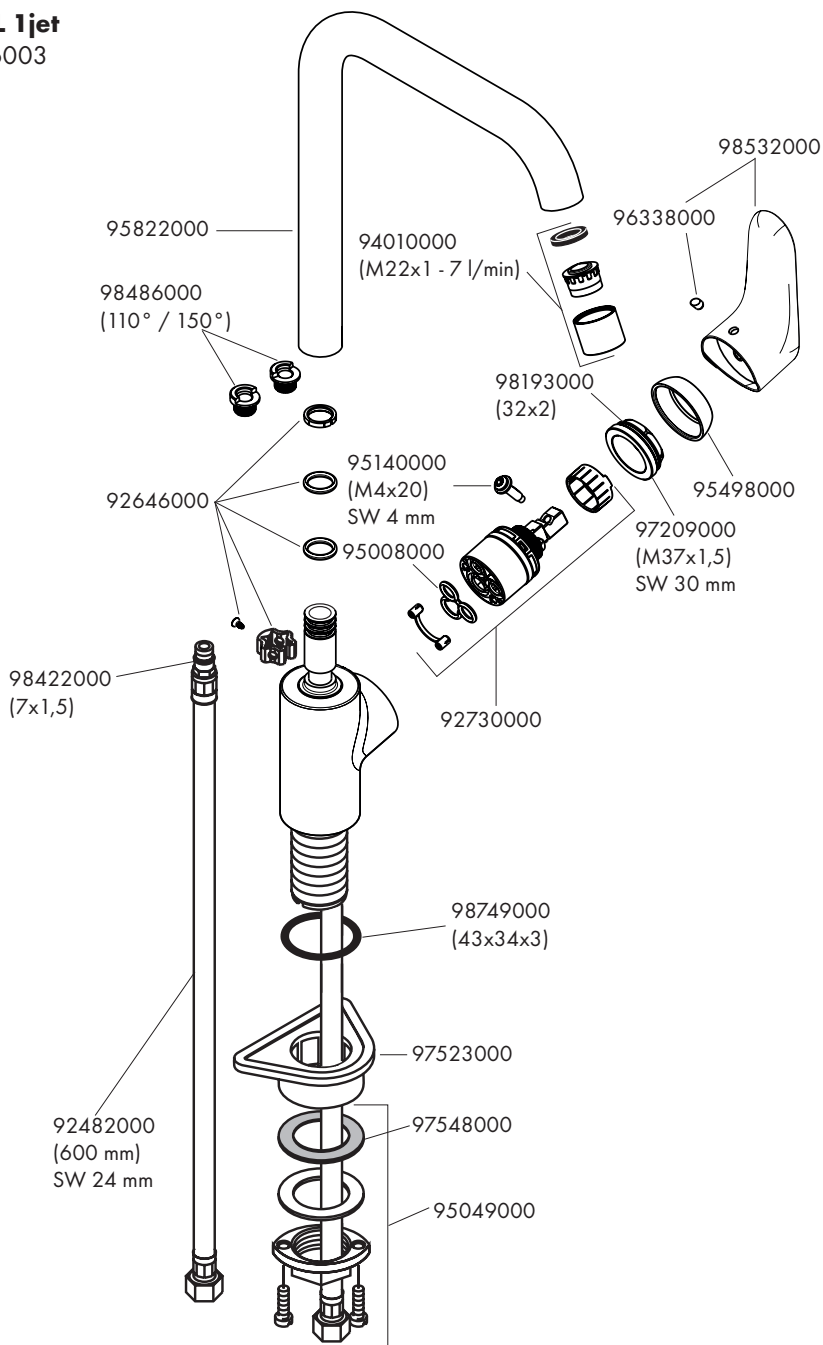




Focus M41 280 jet

31817XX3

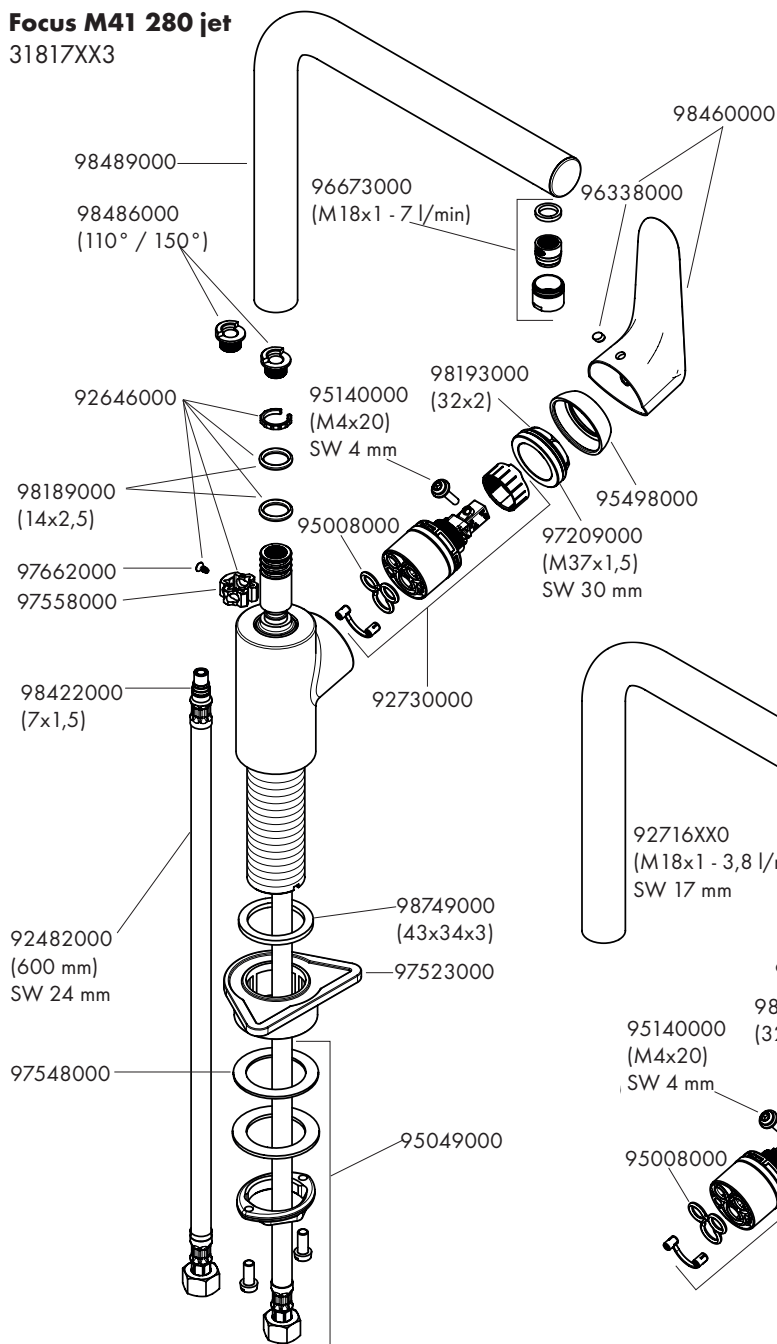


Focus M41 280 jet


31873XX9

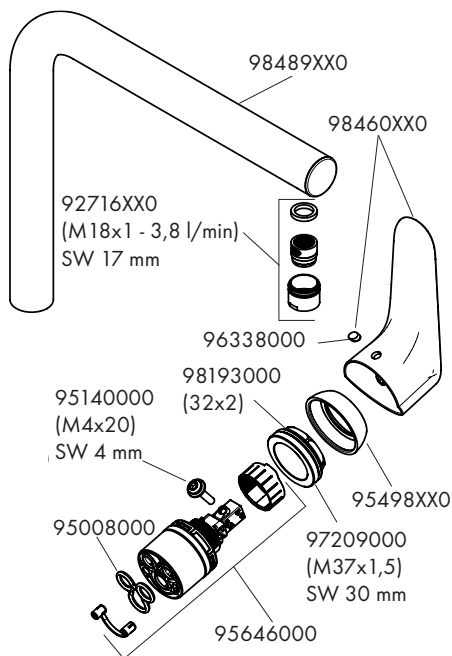

Focus M41 260 1jet 31820XX3

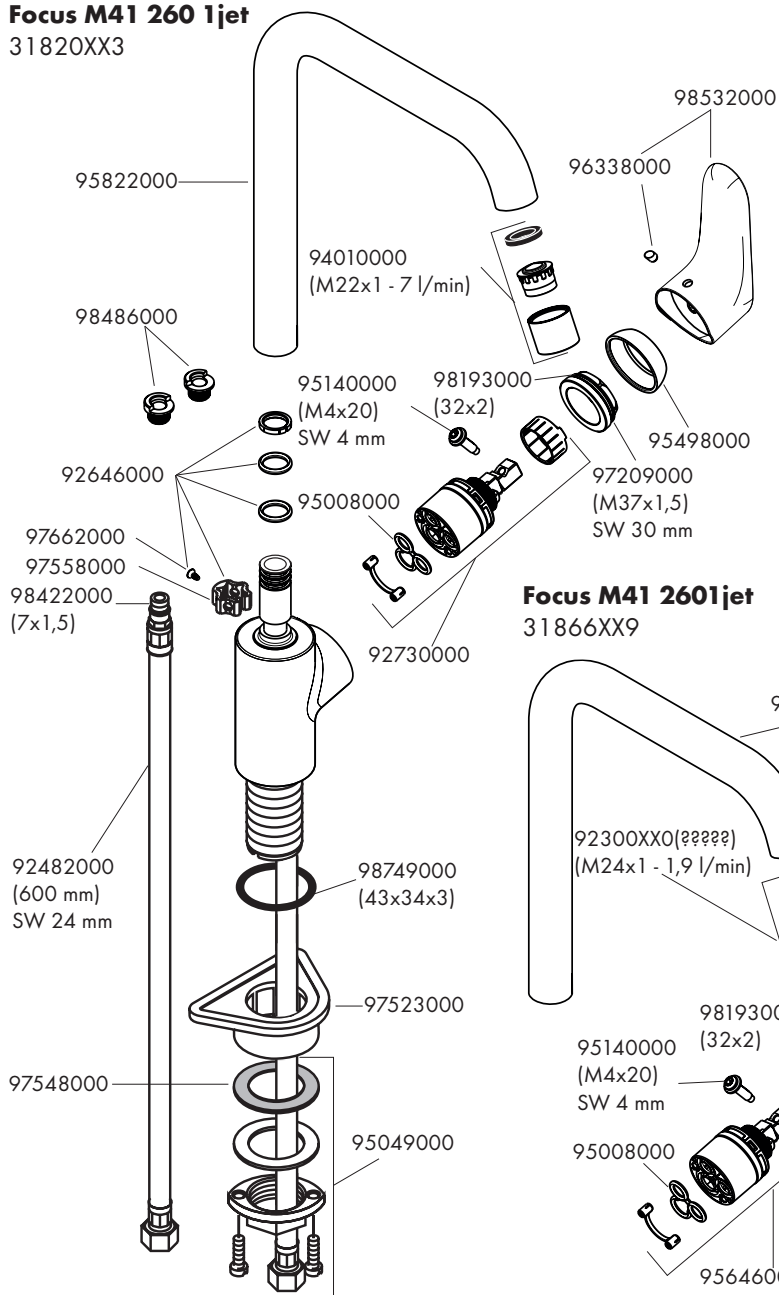

Focus M41 260 1jet 31866XX9

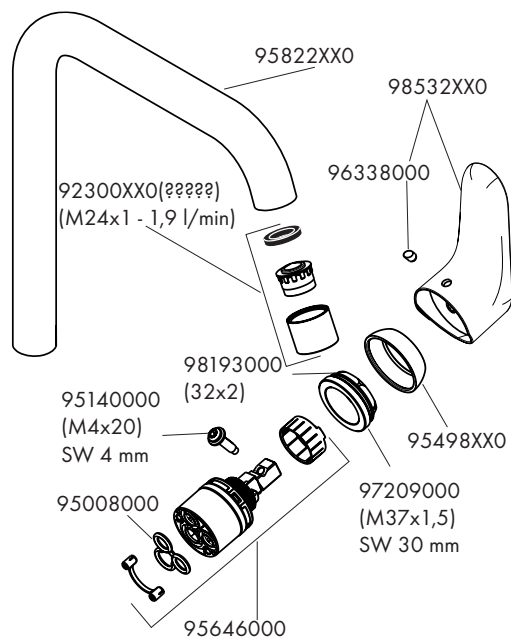

The Hansgrohe logo, consisting of the word "hansgrohe" in a white, lowercase, sans-serif font, centered within a solid black rectangular background.

Hansgrohe · Auestraße 5 · 9 · D-77761 Schiltach · Telefon +49 (0) 78 36/51-1282 · Telefax +49 (0) 7836/511440
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

06/2023
9 0972667