
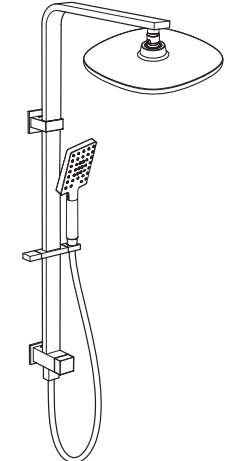
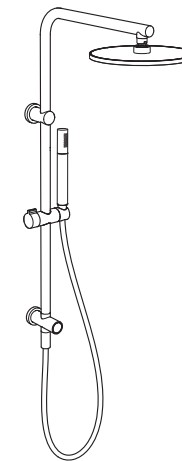
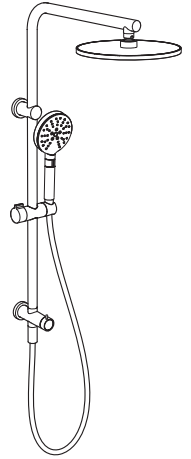
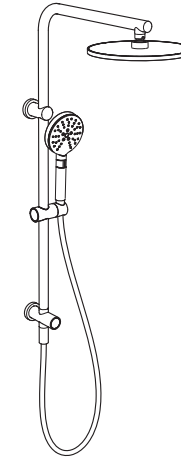


## WARRANTY

Please refer to our website for full warranty terms and conditions:


<https://parisi.com.au/pages/warranty-information>

ENVY II SHOWER COLUMN WITH SLIDING RAIL  
ENVY II SHOWER COLUMN WITH BUTTON SLIDING RAIL  
ENVY II SHOWER COLUMN WITH SLIDING RAIL AND TURN DIVERTER  
TONDO II SHOWER COLUMN WITH SLIDING RAIL  
QUASAR II SHOWER COLUMN WITH SLIDING RAIL

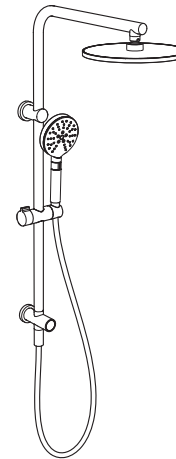


# INSTALLATION


Begin installation by unscrewing grub screws to remove female adaptor and wall bracket from assembly.




Drill hole for wall plug vertically aligned 860mm MAX. from wall outlet. Fit plug, and screw wall bracket into location.




Attach rail to wall and tighten grub screws to fix rail on position.




Attach overhead shower, hose and handshower.



If Top Inlet is required, remove wall elbow/diverter, rail holder and hand shower holder from rail. Swap wall elbow, rail holder, and invert rail. Then, re-assemble.



Repeat steps B, C, and D to install and fix to wall.



TOP INLET (Optional)

# WARNING



1. Inspect all product components prior to installation. If products appear damaged, do not install and contact Parisi Aftersales.



2. Each shower assembly is hydraulically pressure tested at the factory. Do not attempt to dismantle the assembly yourself.



3. Before installing the shower, flush out the water lines to ensure that the pipes are free of any dirt or debris.



4. Do not apply undue force during installation.



5. After installing the shower, check all connection points or leakages. Contact Parisi Aftersales immediately if leakages are identified.



6. Operating pressure for Parisi tapware is 150-500 kPa (including hot and cold hydraulic pressure).



7. Working temperature is less than 80°.

# CLEANING

Constant or regular cleaning will maintain tapware lustre.

- ✓ Only use clear water to rinse and soft cotton cloth to dry. Never use abrasive products (such as cleaners, cloths, or paper) acidic detergent, harsh cleaner or soap.

✓ = Soft Cotton Cloth

✗ = Acid, Strong Detergent

In case of thick sediments proceeds as follows:

1. Clean the surface of your tapware with clear water and soft cotton cloth.
2. Use any of the following to remove the dirt:
  - ✓ Mild liquid detergent.
  - ✓ Clear liquid glass cleaner mixed according to the manufacturers directions.
  - ✓ Non-abrasive liquid polish.
3. After cleaning, rinse the tapware thoroughly again with clear water to remove the cleaner and dry it with a soft cotton cloth.

