
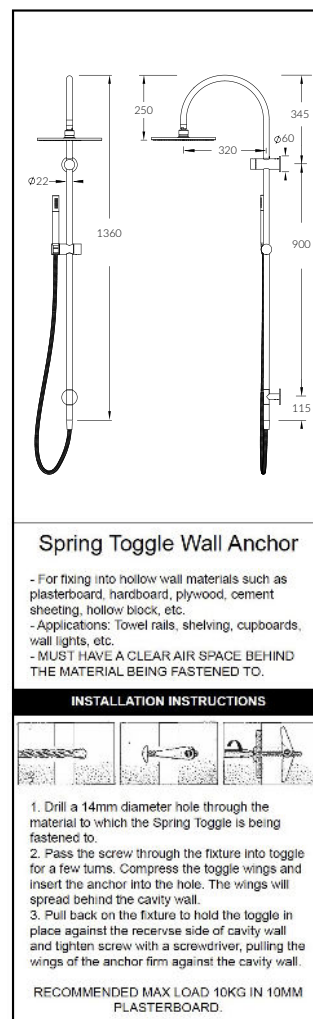


# Voda Twin rail shower

SUSSEX

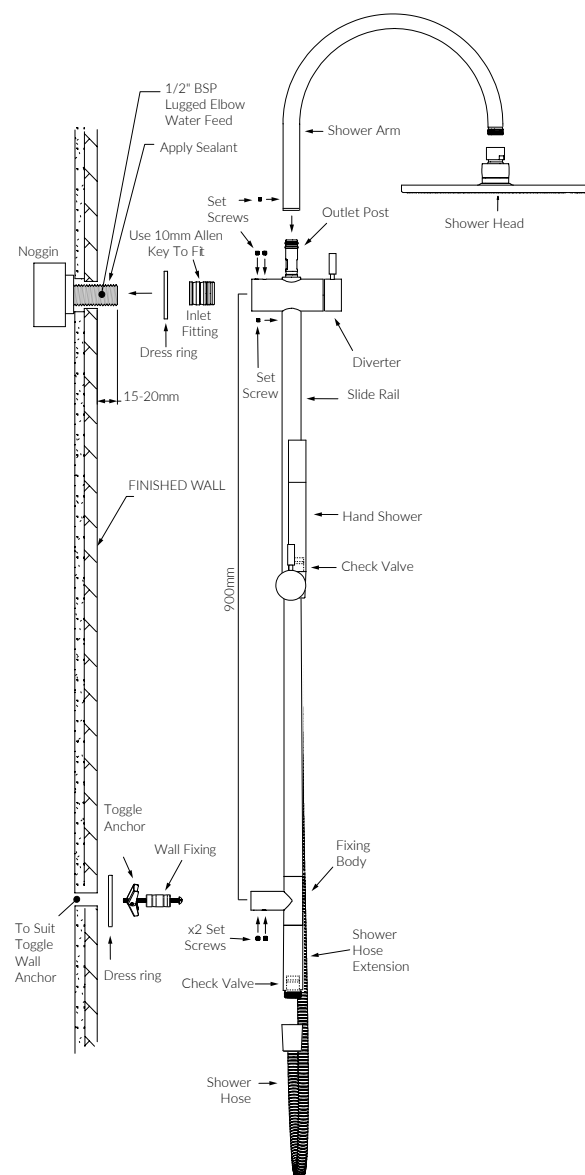

## Product code

VTRS Twin shower

## Installation guidelines

- The Rail is supplied part assembled to suit a Bottom Water Inlet installation.
- For bottom water inlet installation see following page.
- Remove Inlet Fitting and Wall Fixing by loosening the Set Screws.
- Accurately mark out and drill for the Wall Fixing 900mm from centre of Water Feed (see Spring Toggle Wall Anchor guide).
- Ensure the wall penetration is sealed prior to connecting any fittings.
- Apply thread tape or appropriate sealant to Water Feed Thread and attach Inlet Fitting using 10mm Allen key.
- Using the provided Spring Toggle Anchor attach the Wall Fixing.
- Fit the Rail Shower as assembled onto the Wall Fixing and Inlet Fitting, secure by tightening the Set Screws
- Align and fit the Shower Arm over the Outlet Post.
- Secure Shower Arm by tightening Set Screws. (tighten well).
- Attach Shower Head, tighten using spanner.
- Test function and water flow on both Shower Head and Hand Shower.
- Check for water leaks.

## Plumber note

- On-site testing using higher water pressures must be conducted with the Mixer in the closed position. (STATIC TEST)
- Under no circumstances is the Mixer to be opened when exceeding the maximum stated water pressure.
- At the completion of testing, do not relieve any high water pressure by operating the Mixer.
- Exposing the internals of the Mixer Cartridge to higher than specified water pressures will void the manufacturers warranty.



This shower is suitable for High Pressure applications. This shower may not be suitable for use with Gravity-fed water heaters, low and unequal pressure supply networks, instantaneous water heaters, tempering valves and thermostatic mixer valves.

Note: A flow controller has been incorporated within this shower head, care is to be taken during installation not to damage the flow controller when fitting any male connectors.

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500

Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c

Copyright © Sussex Taps.