






HYDROTAP G5 BCHA40 CLASSIC ALL-IN-ONE CHROME

 **BOILING**

 **CHILLED**

 **HOT & AMBIENT**

FILTERED

UNFILTERED



Order Code H5A722Z00AU

Zip HydroTap Classic All-in-One Boiling, Chilled, Filtered water plus Hot and Cold washing up water from a single tap (cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration. Easy to install integrated ventilation tray included.

Manufacturing Code	H5A722Z00AU
Capacity	Commercial
Number of people	21-40
Boiling Cups per hour	160
Chilled Cups per hour	125

Tap	Zip CLASSIC All-in-One Tap (Chrome)
Water Pressure	Min 300kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold

Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.97kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W395mm x D464mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit


Installation Detail

Ventilation requirements


3 Contact your local service provider if ventilation is not suitable

Clearance envelope

Position the Tap and the Command Centre as close together as possible.




Vent tray (kit no. 93540)




Detail A. Air inlet grille

Cut-out in cabinet floor




Detail B. Vent Tray air outlet

Cut-out in cabinet floor



Tap Positioning

Position the Tap to dispense into the sink, allowing clearance for a cup or teapot.

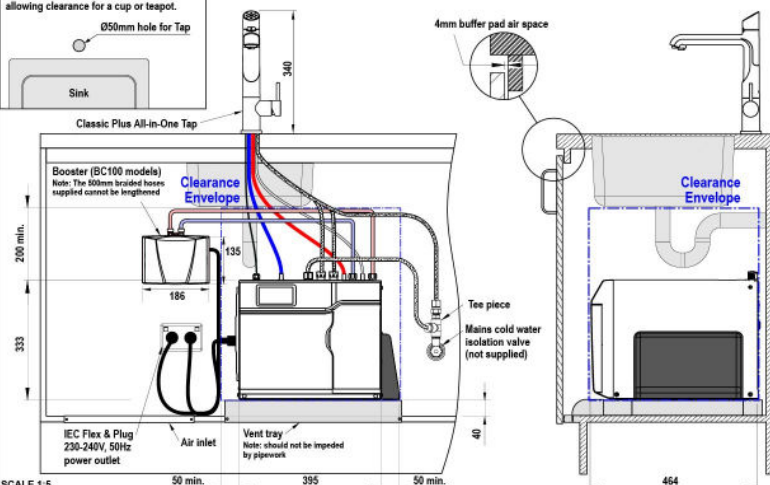


SCALE 1:5

50 min. 395 50 min. 464


ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap Tap options

Classic Plus All-in-One Tap

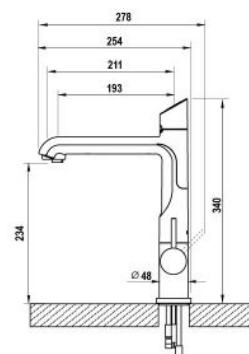


Classic All-in-One Tap

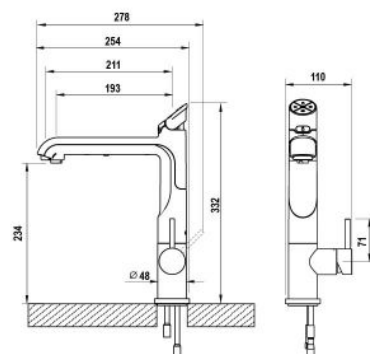

Vented mixer tap installation

Only cold water supply required

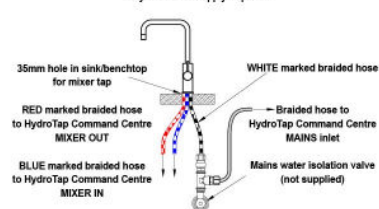

HydroTap G5
BC40 H, BC60 H, BC100 H

shown with Classic Plus All-in-One Tap (Vented)